


EchoPanel® Letters – Product Detail Sheet


Date: 6/11/2020

NAME: EchoPanel® Letters (12mm)
DESIGNER: Cuts By Design
ORIGIN: Made in Australia
COLOURS: EchoPanel® Onyx 550
FINISH: Felt like finish
COMPOSITION: 100% PET (60% recycled)
DIMENSIONS: High 220mm
Width 40-207mm (varies by letter)
Depth 12mm
FONT: Bebas Neue Regular

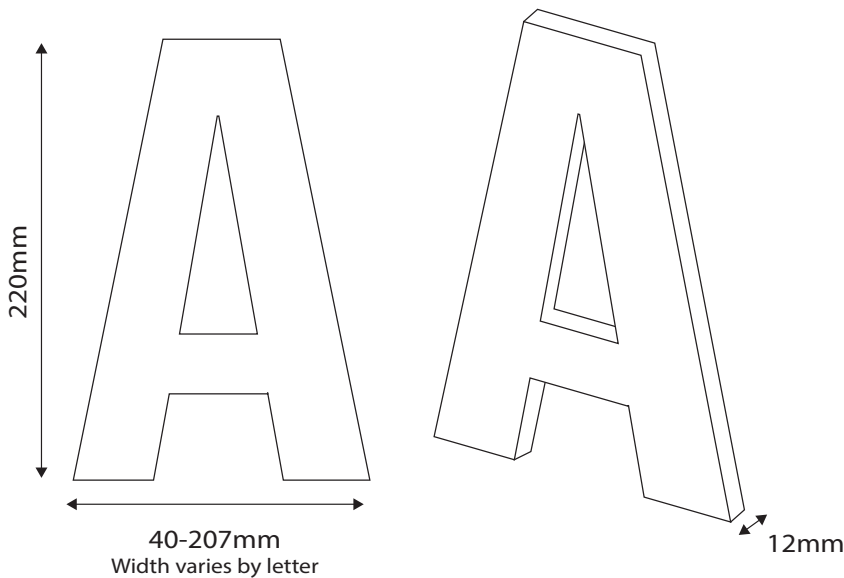

WEIGHT: 2,400g/m² +/-10%
THICKNESS: 12mm ±7%

COLOURS ECHOPANEL®



Onyx 550

PERFORMANCE ECHOPANEL® 12MM

COLOUR FASTNESS TO LIGHT: ISO 105-B02-1994 Rating: 6-7

FIRE TEST: AS 1530.3
ISO 9705: Group 1
GB8624 B1
BS EN 13501.1: Classification B-s1, d0

EchoPanel® CARE: REGULAR CARE Protect from direct sunlight.
Vacuum regularly using low suction and smooth attachment.

SPOT CLEANING Treat spills and stains as soon as possible. Avoid concentrated rubbing. Use minimal pressure only. Gently scrape soil or mop liquid from the surface of the fabric, do not scrub. Apply proprietary cleaning agents strictly according to instructions to remove the residue of the spill. Do not saturate the fabric or interior with water or other cleaning liquids. Warning, avoid excessive amounts of water. Ensure adequate ventilation if the product is likely to be subject to excessive moisture. May be spot cleaned with dry cleaning solvent.

CLEANING Professional cleaning recommended. Do not use dishwashing or laundry detergents. Use only upholstery detergent. Do not wet filling. Allow to dry away from direct heat thoroughly before re-use

SOUND ABSORPTION: AS ISO 354 – 2006
NRC Value: 0.65 (with no air gap)
NRC Value: 0.75 (with 20mm air gap)
NRC Value: 0.85 (with 50mm air gap)

FLEXURAL PROPERTIES: ISO 1209-1-2007 @20mm Deflection

VOC EMISSIONS: ASTM D5116 Rate: < 0.02 mg/m²/hr (7 days)



ENVIRONMENTAL: EchoPanel® achieves GreenTag Certification GreenRate: Level A



Cutsbydesign © 2020.

For more information visit www.cutsbydesign.com.au or email cutsbydesign@mitchelllaminates.com.au